

# NUMBER

## SUPER SNIPE, SNIPE & SIXTEEN LUBRICATION CHART




When the car has covered a considerable mileage it is advisable to use the next heavier Patent Castrol grade in Summer and the next heavier Patent Castrol Grade in Winter for the engine.

### CORRECTION


ENGINE—Patent Castrol XL is now recommended for Summer and Winter use

No. 22




### EXPLANATION OF SYMBOLS.

	<p>WAKEFIELD PATENT CASTROL XL (in Summer), WAKEFIELD PATENT CASTROLITE (in Winter). High quality motor oils recommended for the Humber engine. Note—PATENT CASTROL XXL is recommended for the gear box.</p>		<p>WAKEFIELD CASTROL HI-PRESS GEAR OIL. A special heavy duty lubricant for the Humber rear axle, steering box and chassis lubrication.</p>		<p>WAKEFIELD CASTROLEASE HEAVY. Recommended for the Humber wheel bearings, and wherever grease is indicated.</p>
---	--	---	--	---	--

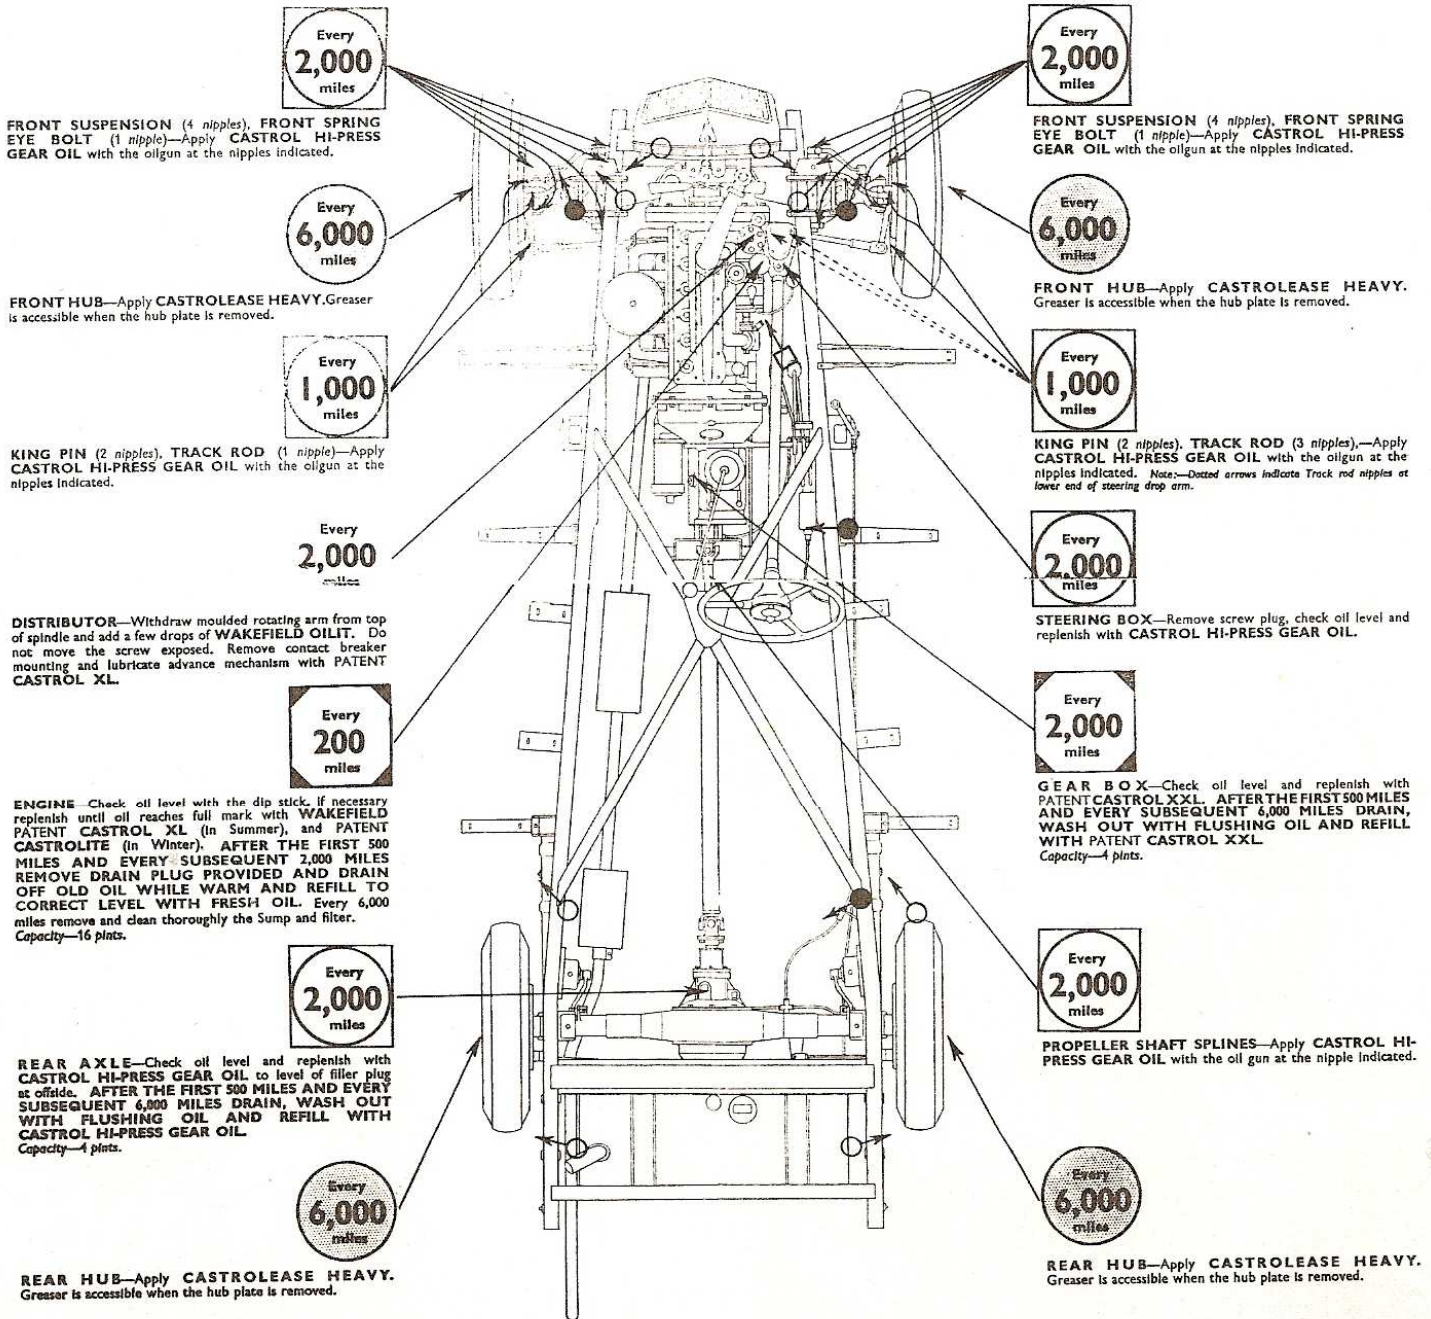**WARNING.** Do not ask for "XL" when you require CASTROL. Ask for "PATENT CASTROL XL" and see it drawn from a PATENT CASTROL container.



### ALSO REQUIRING ATTENTION.

- CLUTCH AND BRAKE CABLES—Every 6,000 miles apply CASTROLEASE BRAKE CABLE GREASE at the nipples indicated thus 
- ROAD SPRINGS—Every 6,000 miles jack up the car to take the weight off the springs and apply CASTROLEASE G at the nipples indicated thus  on the spring gaiters.
- WATER PUMP—Every 500 miles give one turn to the greaser filled with CASTROL WATER PUMP GREASE. Indicated thus 
- SHOCK ABSORBERS—Every 6,000 miles check fluid level and if necessary replenish with the correct fluid.
- DOOR LOCKS, HINGES, STRIKING PLATES AND DOVETAILS—Every 1,000 miles apply a few drops of WAKEFIELD OILIT.
- UPPER CYLINDER LUBRICATION—In order to lubricate more effectively the pistons, piston rings, valve stems and guides, WAKEFIELD CASTROLLO should be used. Use the cap of the CASTROLLO tin as a measure in the proportion of one cap full to every four gallons of fuel. A sufficient quantity of CASTROLLO may be obtained loose at most filling stations, to treat the amount of fuel purchased.

TYRE PRESSURES—Front 28 lbs.; Rear 28 lbs.

Issued by C. C. WAKEFIELD & CO., LTD., ALL BRITISH FIRM, WAKEFIELD HOUSE, CHEAPSIDE, LONDON, E.C.2.